



Dongguan Hust Tony Instruments Co.,Ltd

东莞华科东尼仪器有限公司


Address: No. 1 Tech 9 Road, High - New Tech Development Zone, Songshan Lake, Dongguan City 523808, China

Tel: 86-769-23010657

Fax: 86-769-23010667

Email: Addams@tonyhk.hk

Sulfur Dioxide Testing Machine TW-027-Manufactuer

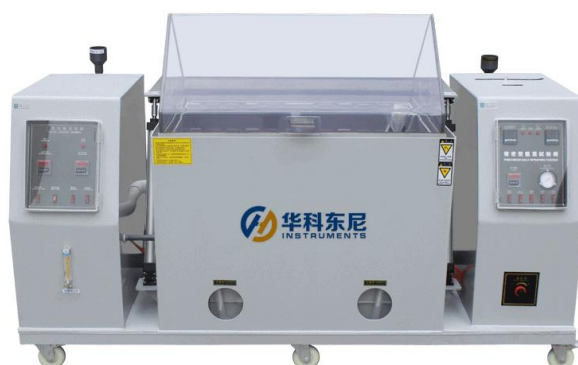

Sulfur dioxide testing machine is suitable for accelerated corrosion testing of protective layers, parts, electronic devices and industrial products of metal materials, and quickly and easily reproduces the corrosion process of sprayed and untreated metal surfaces.

Sulfur dioxide test machine is designed and manufactured according to GB/T2423.19-81 GB/T10125-97 GB/T9789 IEC 60068-2-42/43 and other related standards, suitable for sulfur dioxide and hydrogen sulfide gas corrosion test.

Technical Specifications

Model	TW-027
Inner Box Size (W×H×D)	600X450X400 mm (Incl. top height not included)
Outer Box Size (W×H×D)	2200X1460X950mm
Nominal within, Volume	108L (incline top volume)
Note	The Angle of the top oblique top is 100°, and the height of the oblique top is 375mm
Net Weight	200 kg
Gas Concentration	0.1%~1%
Temperature Range	RT+10℃~55℃
Humidity Range	85%~95%R.H

Standards

CNS3627, 3885, 4159, 7669, 8886,
JIS D-0201, H-8502, K-5400, Z-2371,
ISO 3768, 3769, 3770,
ASTM B-117, B-268,
GB-T2423
DIN 50021-SS